


NP型 UPS電池規格


機種	電壓 (V)	容量(AH)			10分率	15分率	外形尺寸 (mm)			重量約 (kg)	端子	端子位置	難燃等級	期待壽命
		5HR	10HR	20HR			長	寬	總高					
NP1.2-6	6	-	-	1.28	-	-	97	25	54.5	0.3	A、B	1	UL94HB、 UL94V0	3~5 years
NP3-6	6	-	-	3	-	-	134	34	64	0.66	A、B	1	UL94HB、 UL94V0	3~5 years
NP4-6	6	-	-	4	-	-	70	47	105.5	0.8	A、B	5	UL94HB、 UL94V0	3~5 years
NP7-6	6	-	-	7	-	-	151	34	97.5	1.3	A、B	1	UL94HB、 UL94V0	3~5 years
NP8-6	6	-	-	8	-	-	151	50	97.5	1.9	A、B	1	UL94HB、 UL94V0	3~5 years
NP10-6	6	-	-	10	-	-	151	50	97.5	1.9	A、B	1	UL94HB、 UL94V0	3~5 years
NP12-6	6	-	-	12	-	-	151	50	97.5	2	A、B	1	UL94HB、 UL94V0	3~5 years
NP1.2-12	12	-	-	1.2	-	-	97	47.5	54.5	0.59	A、B	3	UL94HB、 UL94V0	3~5 years
NP2.3-12	12	-	-	2.3	-	-	178	34	64	0.9	A、B	1	UL94HB、 UL94V0	3~5 years
NP4-12	12	-	-	4	-	-	90	70	105.5	1.6	A、B	1	UL94HB、 UL94V0	3~5 years
NP5-12	12	-	-	5	-	-	90	70	105.5	1.85	A、B	1	UL94HB、 UL94V0	3~5 years
NP7-12	12	-	-	7	-	-	151	65	97.5	2.3	A、B	4	UL94HB、 UL94V0	3~5 years
NP12-12	12	-	-	12	-	-	151	98	97.5	4.1	B	4	UL94HB、 UL94V0	3~5 years
NP18-12	12	-	-	17.2	-	-	181	76	167	6	C	2	UL94HB、 UL94V0	3~5 years
NP26-12	12	-	-	26	-	-	175	166	125	8.3	C、Q	2	UL94HB、 UL94V0	3~5 years
NP38-12	12	-	-	38	-	-	197	165	170	14.3	D、H	2	UL94HB、 UL94V0	3~5 years
NP40-12	12	-	-	40	-	-	197	165	175	14.5	D、H	2	UL94HB、 UL94V0	3~5 years
NP65-12	12	-	-	65	-	-	350	166	174	22	E、G	2	UL94HB、 UL94V0	3~5 years

NP型 UPS電池特性


標準型各率放電特性圖

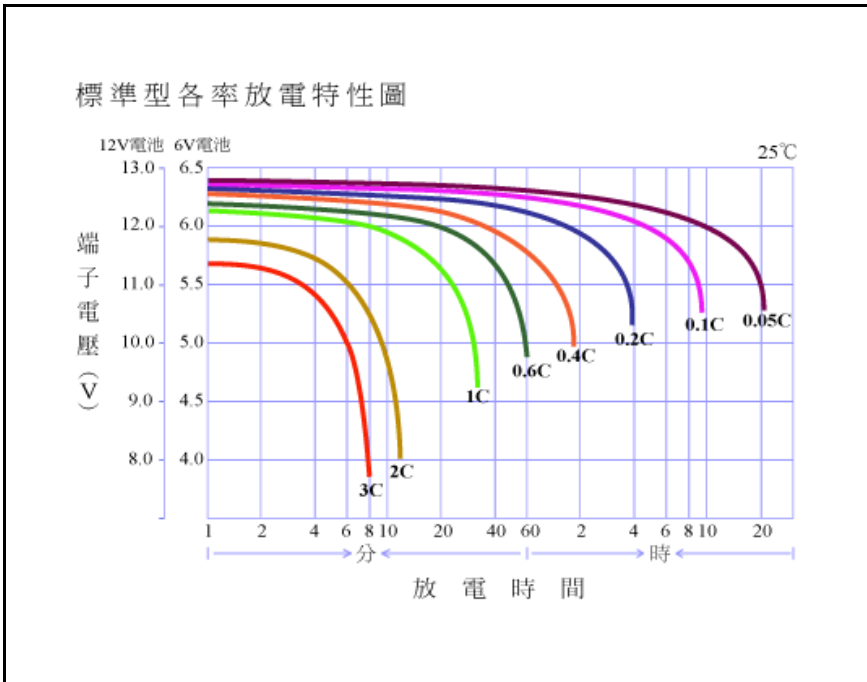


高率型各率放電特性圖

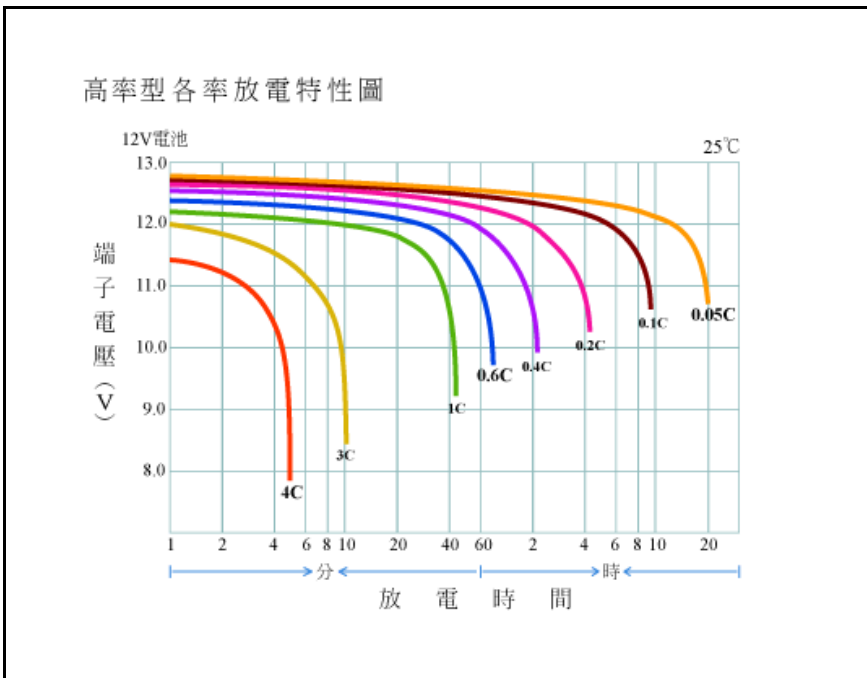


溫度 / 容量關係表

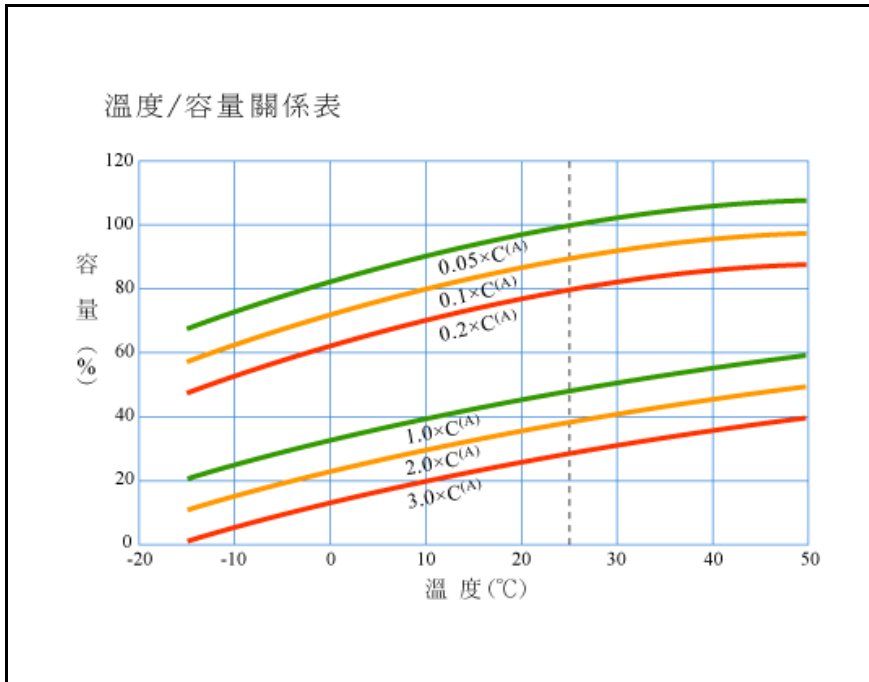


定電流定電壓充電特性圖

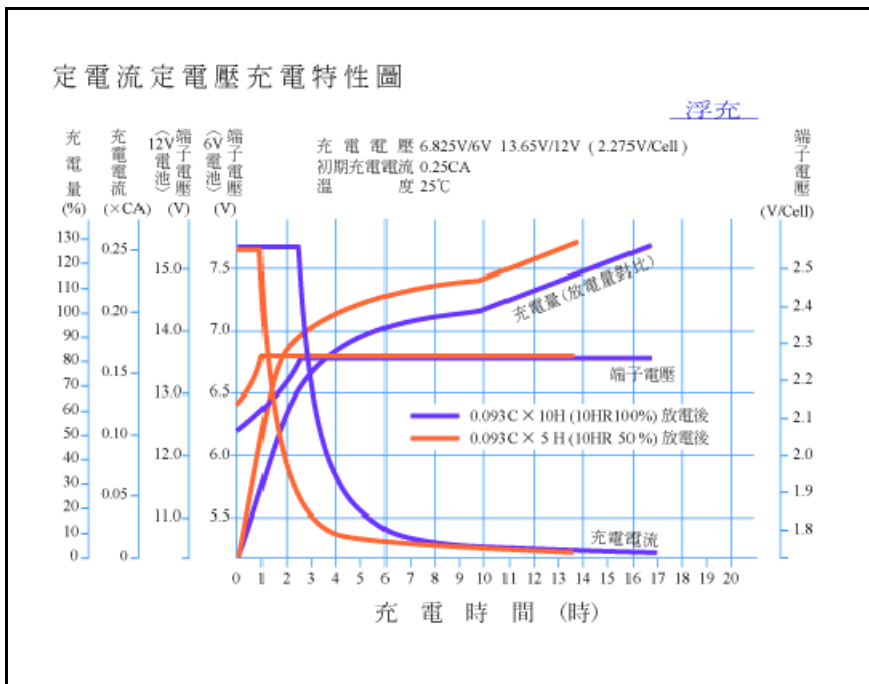


定電流定電壓充電特性圖

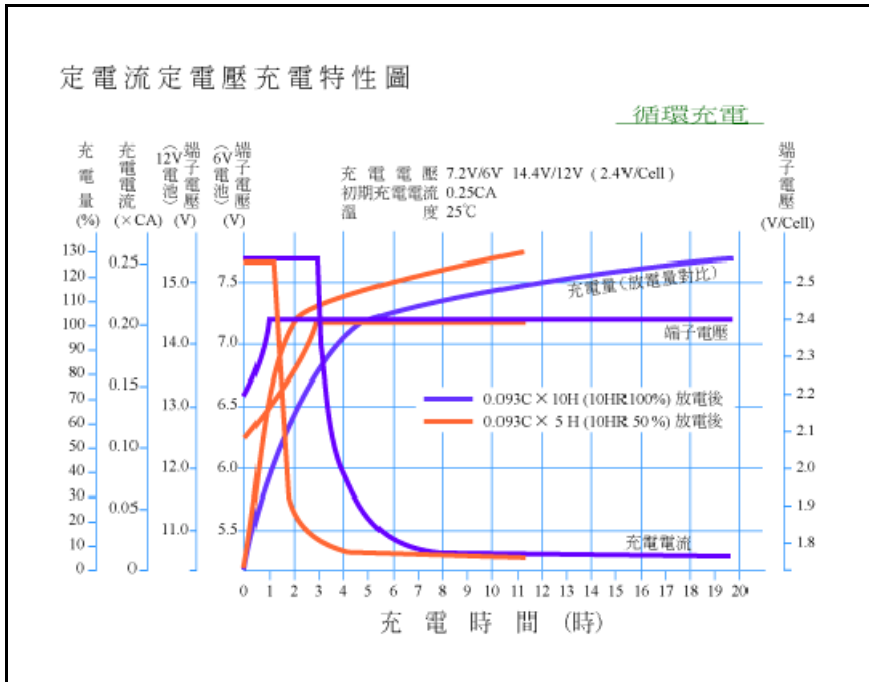


自我放電特性圖

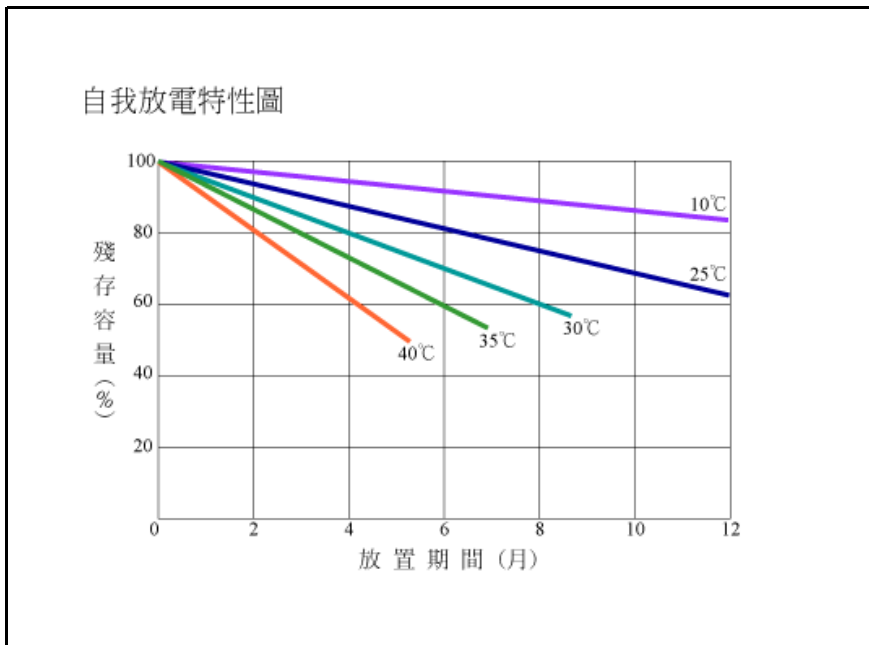


開路電壓 / 殘存容量 關係表

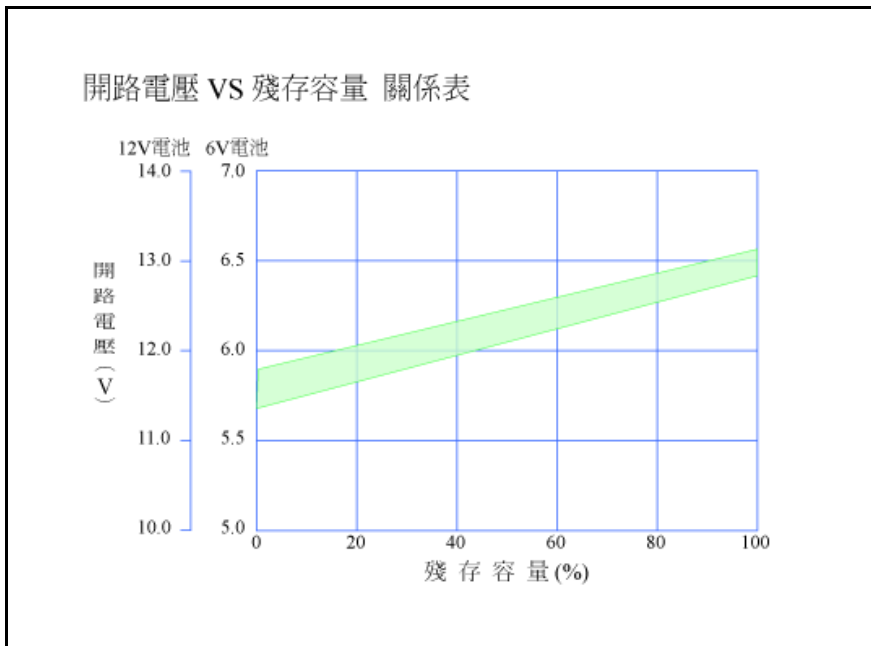


循環壽命特性圖

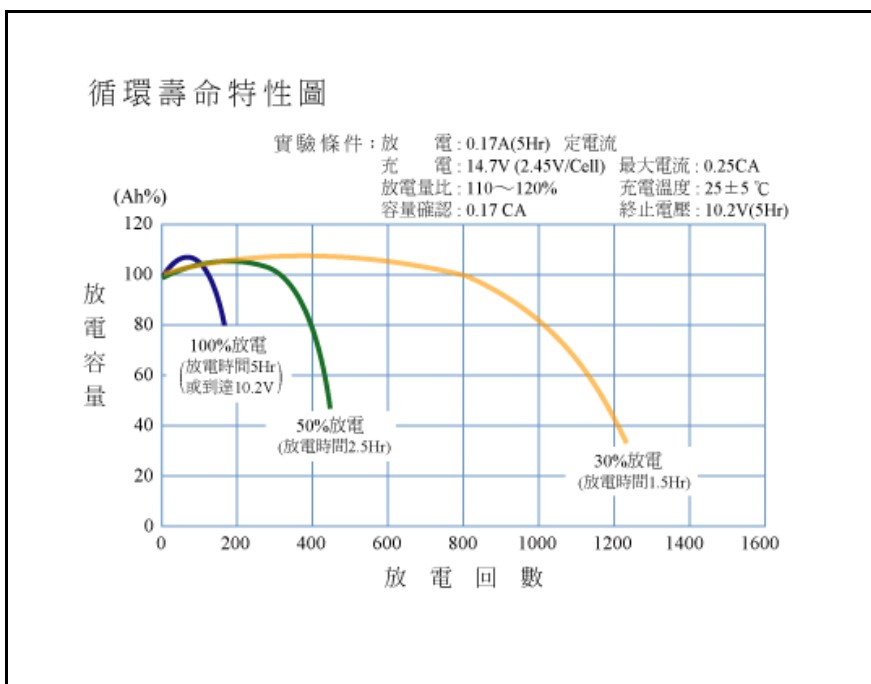

浮充壽命特性圖

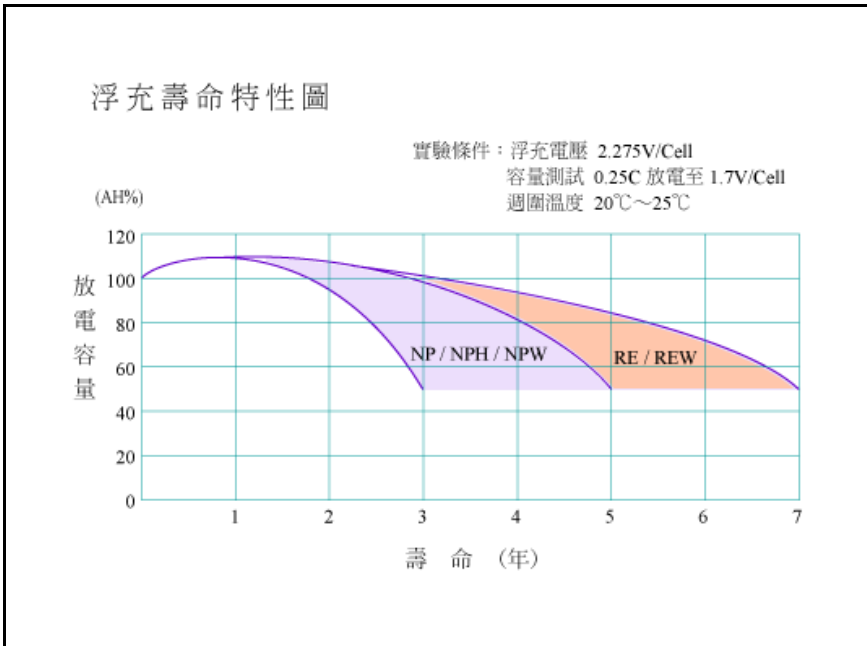

浮充充電電壓 / 壽命 關係表

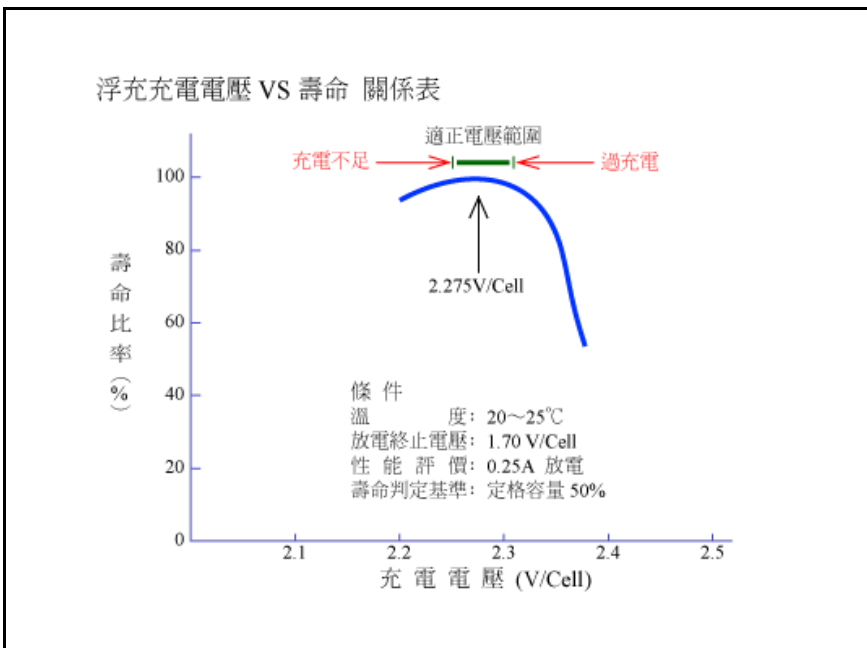

浮充期待壽命特性圖 (溫度 / 壽命)

浮充期待壽命特性圖 (溫度 / 壽命)

