


## REC型循環應用電池規格


機種	電壓 (V)	容量(AH)			10分率	15分率	外形尺寸 (mm)			重量約 (kg)	端子	端子位置	難燃等級	期待壽命
		5HR	10HR	20HR			長	寬	總高					
REC10-12	12	-	-	10.0	-	-	151	65	115.5	3.2	B	4	UL94HB	-
REC12-12	12	-	-	12.0	-	-	151	98	97.5	4.2	B	4	UL94HB	-
REC14-12	12	-	-	14.0	-	-	151	98	97.5	4.2	B	4	UL94HB	-
REC22-12	12	-	-	22.0	-	-	181	76.2	167	6.2	C	2	UL94HB	-
REC50-12	12	-	-	45.0	-	-	197	165	175	15.7	G	2	UL94HB	-
REC80-12	12	-	-	80.0	-	-	259	168	212.5	27	G	1	UL94HB	-
U1-36E-12	12	-	-	36.0	-	-	196	130	169	11.2	Q	1	UL94HB	-

## REC型循環應用電池特性


### 標準型各率放電特性圖

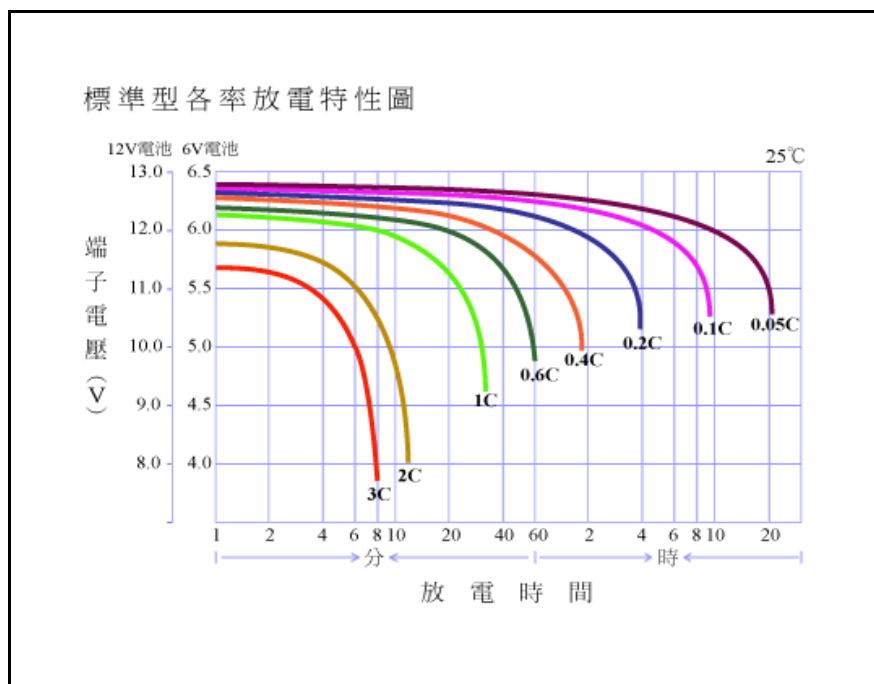


高率型各率放電特性圖

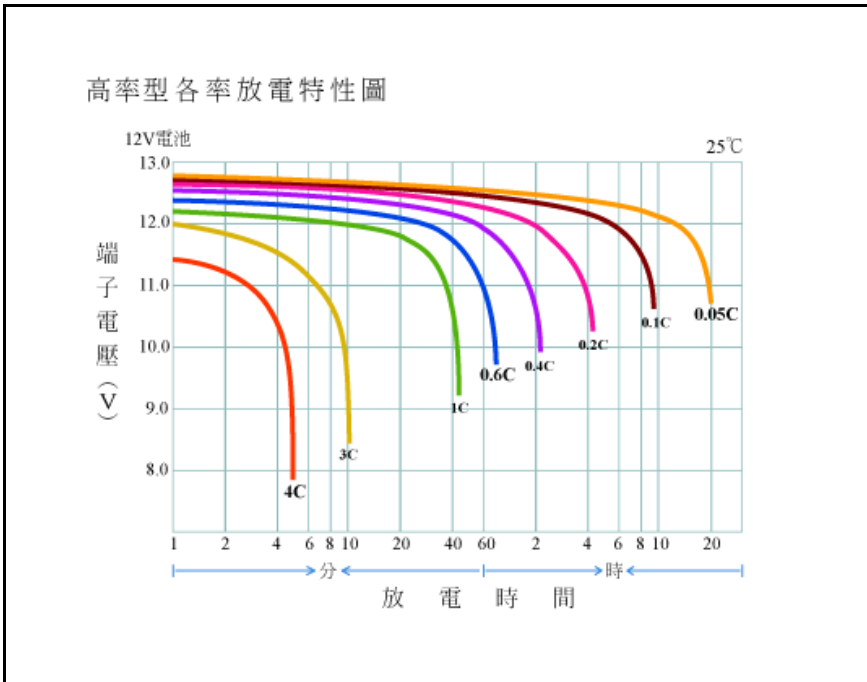


溫度 / 容量關係表

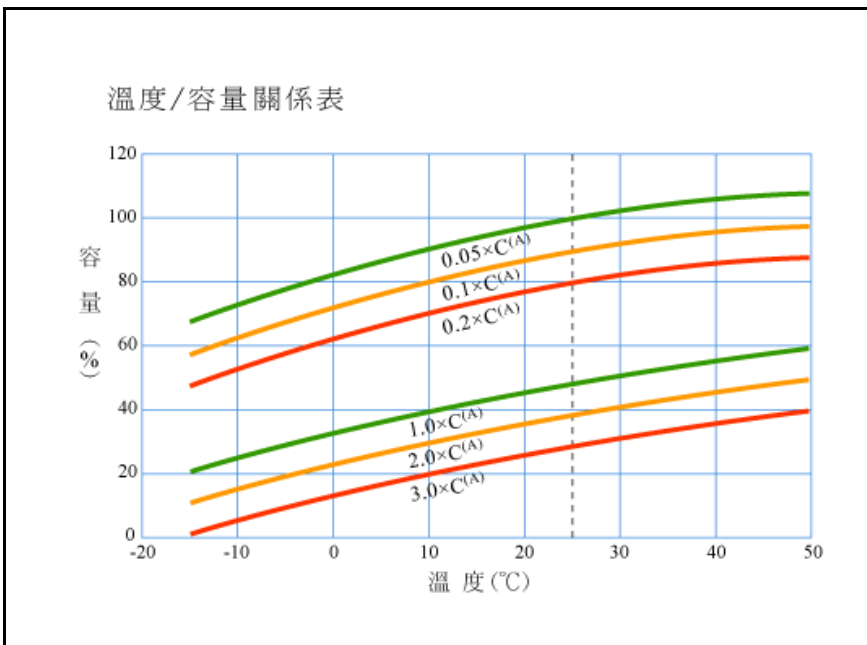


定電流定電壓充電特性圖

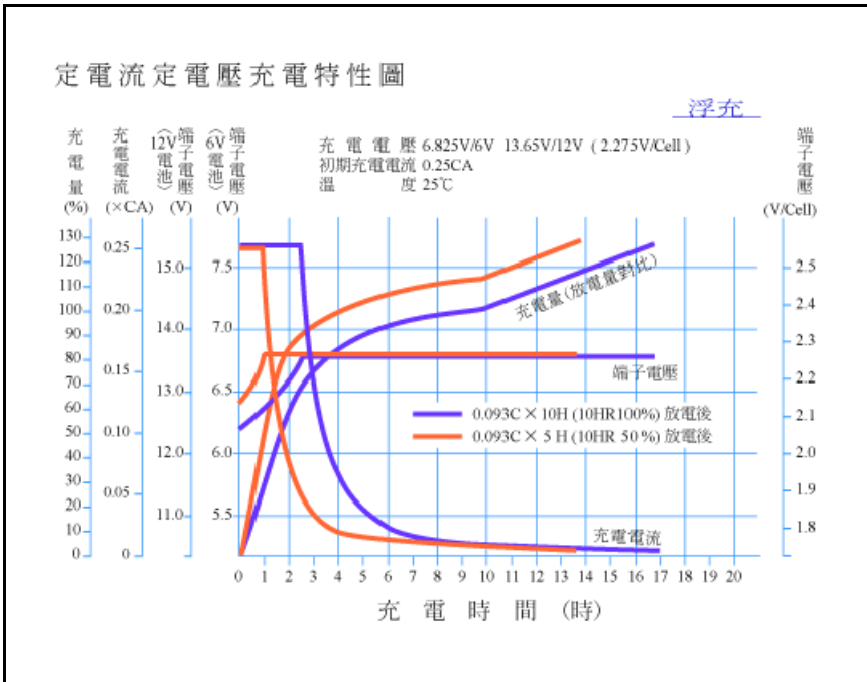


定電流定電壓充電特性圖

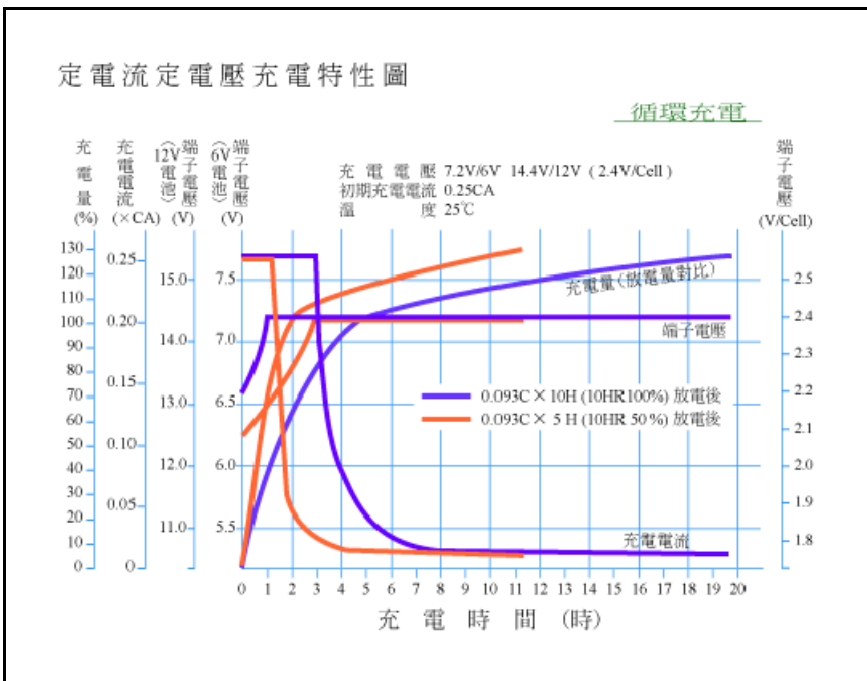


### 自我放電特性圖

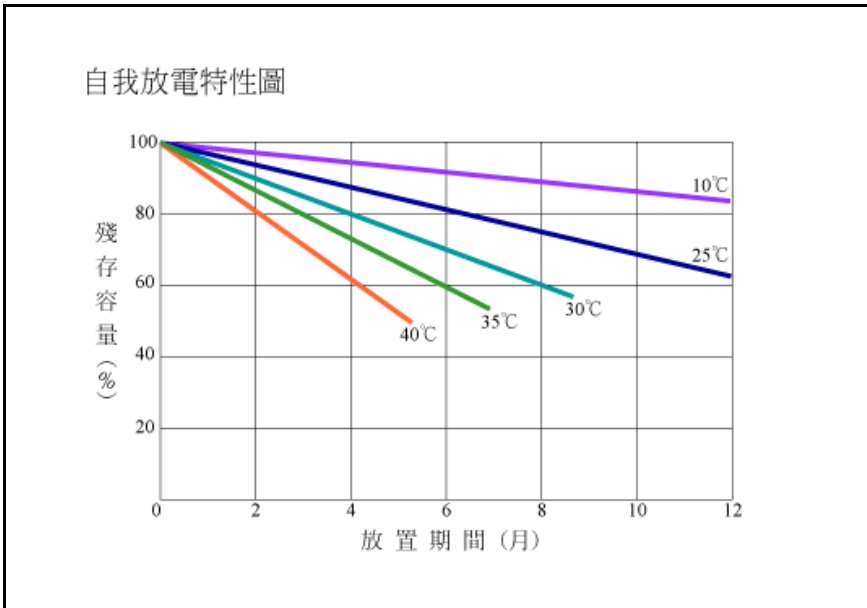


### 開路電壓 / 殘存容量 關係表

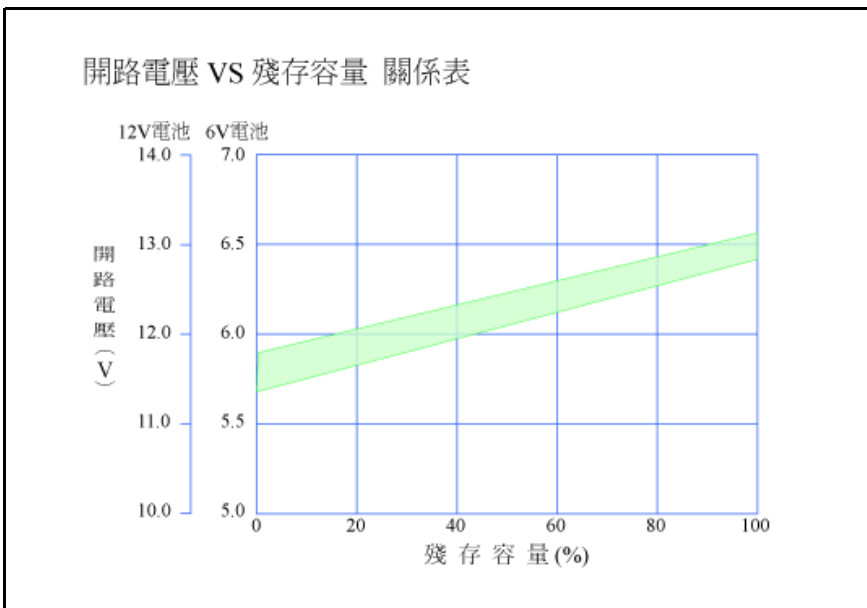


循環壽命特性圖

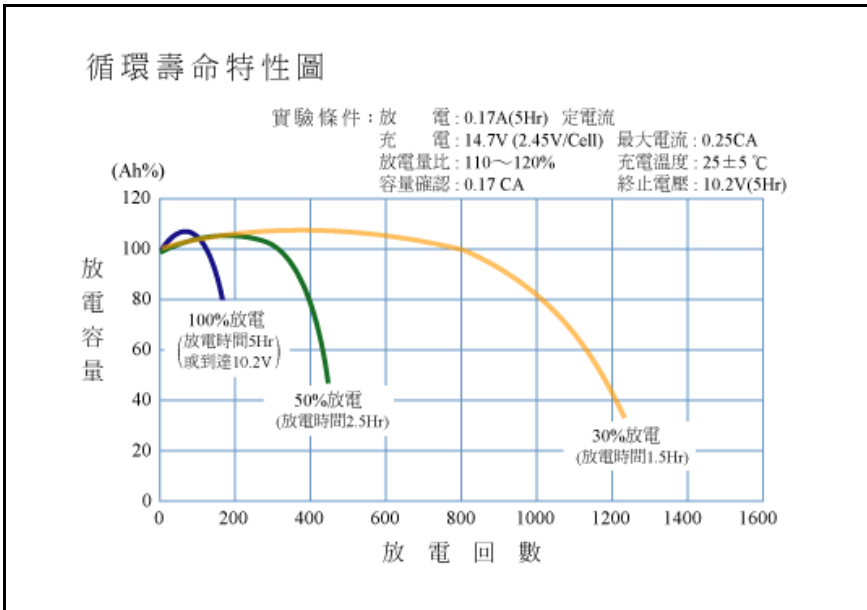

浮充壽命特性圖

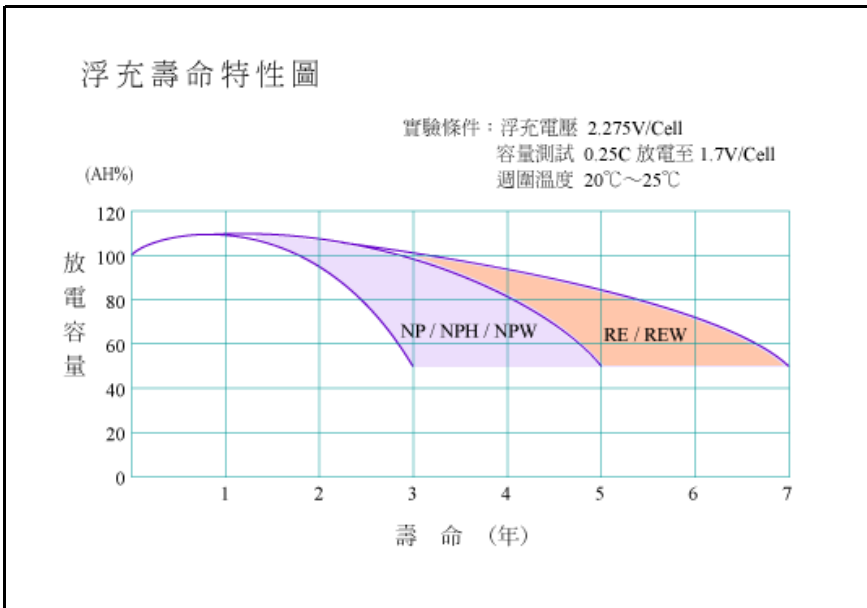

浮充充電電壓 / 壽命 關係表

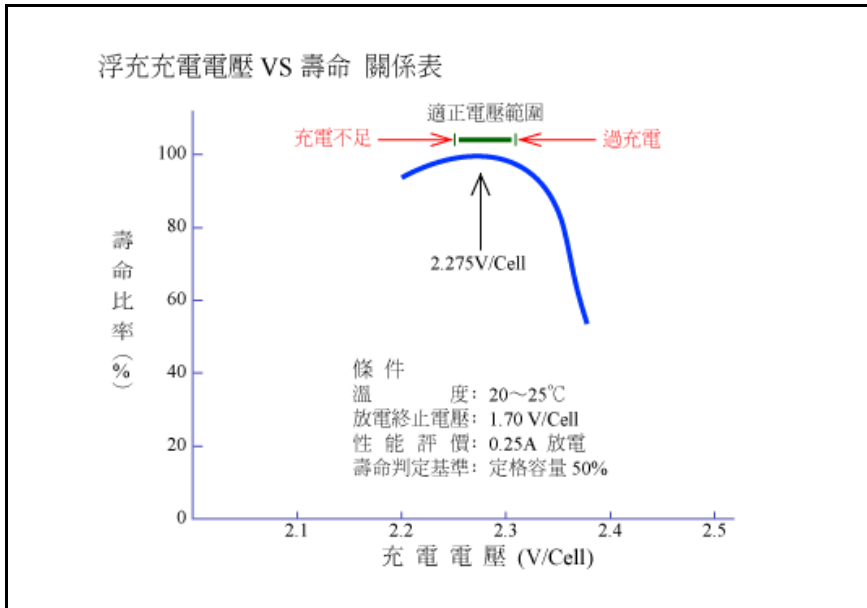

浮充期待壽命特性圖 (溫度 / 壽命)

